

# PV-40 Fire hydrant cabinet, surface-mounted



## Description

---

Basic model fire hydrant cabinets are manufactured from 1,25 mm steel and the reels are made from 1 mm galvanized steel. The cabinet has a welded back wall that strengthens the structure and a reinforced door. The doors open 180 degrees.

PV-40 is ideal with larger hose sizes. The cabinet includes a hose, a valve, a hinged carrying frame and a nozzle – all equipped with couplings.

## Standard

---

Manufactured according to EN 671-1 standard specifications.

## Surface finish

---

Epoxy powder-coated

Standard colours:

- grey (RAL 7040)
- white (RAL 9016)
- red (RAL 3020)

## Hose

---

The hose is coated with 100% polyester fibre and synthetic EPDM rubber on the inside.

Operating pressure: 2,5 MPa

Burst pressure: 5 MPa

## Lock

---

The door is equipped with a special lock that is shielded by a breakable protective glass (picture on the right).




## Hose size alternatives

---

Code	Model	Size
2954682	PV-40	2"-20m
2954684	PV-40	2"-2x20m
2951968	PV-40	empty cabinet
2953300	PV-40	inc. carrying frame, no hose

## Dimensions

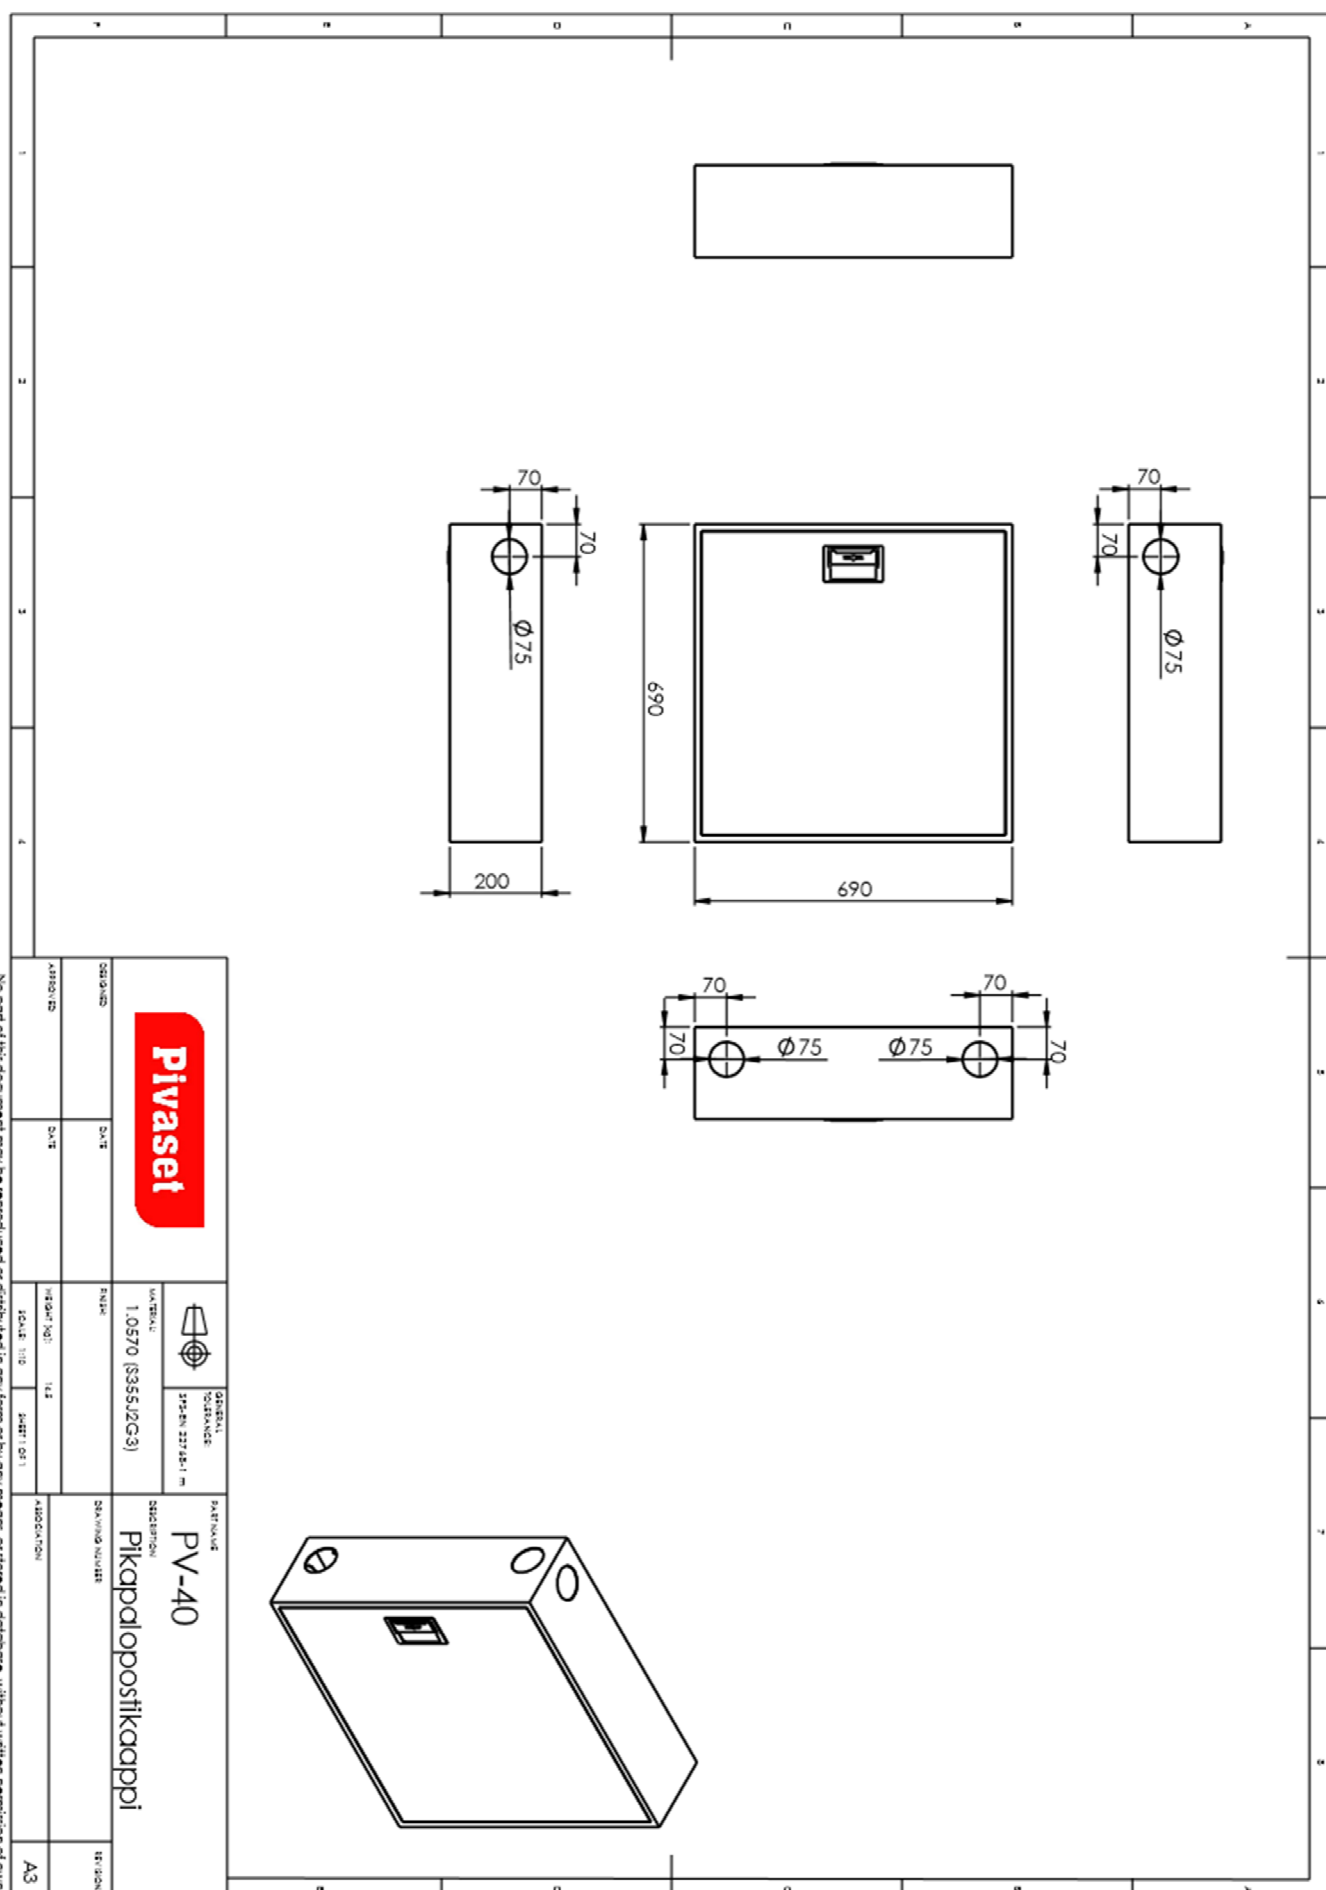

No part of this document may be reproduced or distributed in any form or by any means, or stored in database, without written permission of owner.