

PV-85 hose cart



Description

Width 550 x height 900 x depth 600 mm

A reel cart designed for professional use. Includes a fire hydrant hose, a spray nozzle, a rewinding knob and a feed hose (3 m) with a 1" quick-connect fitting.

Surface finish

Epoxy powder coated.

Standard colours:

- grey (RAL 7040)
- white (RAL 9016)
- red (RAL 3020)

Hose

1. Fabric surface polyester/EPDM lightweight hose. Fulfils EN 694:2001 standard.
 - Operating pressure: 1,2 MPa
 - Burst pressure: 9 MPa
2. Nitrile/PVC fire hydrant hose reinforced with polyester webbing. Fulfils EN 694:2001 Type A Class 2 standard.
 - Operating pressure: 1,2 MPa
 - Burst pressure: 4 MPa

The hose assembly is equipped with a spray nozzle.



Reel

The reels are painted red. The hub of the reel is made from a special pressure-tested brass casting. The reel is equipped with a spring-reinforced feed hose, a nozzle and a 1” shut-off valve.

Hose size alternatives

Code	Model	Size
2931402	PV-85	19 mm/ 20 m
2931404	PV-85	19 mm/25 m
2931406	PV-85	19 mm/30 m
2931408	PV-85	19 mm 40 m
2931410	PV-85	19 mm/45 m
2931422	PV-85	25 mm/20 m
2931424	PV-85	25 mm/25 m
2931426	PV-85	25 mm/30 m
2931400	PV-85	Without hose

PV-85

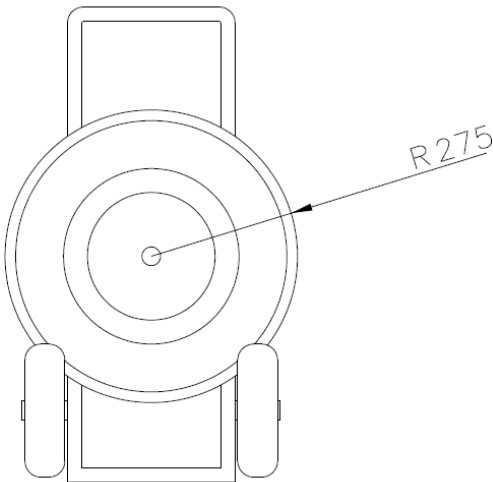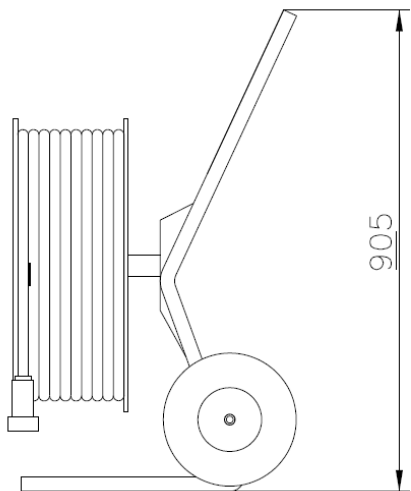

Exploded view of the reel



18	Kienityslelyn ruvi, MB12 smetkionto	4
17	Kelan kienityslelyn, 150x150x3 smetity	1
16	Pabitysuojas	1
15	Kelakhasas ruvierni, MB smetity	4
14	Kelakhasas ruvi, MB200 smetity	4
13	Kienitysruvi itsekieritys, MB10 smetity	6
12	Kienitysruvierni, M16 Nylon smetity	1
11	Aluslelyn, M16 D30 d17 smetity	1
10	Joutsenkaula, messinki	1
9	Kelanleppä, 0,75 smetity	1
8	Tulelyn, 1,25 smetity	1
7	Kelapöytä, smetity mataltu RAL3820	2
6	0-terpas, kumi	2
5	0-terpas, kumi	1
4	0-terpas, kumi	1
3	Laakeriterpas, 3m D47 d40,5 nylon	1
2	Kesähoikkeli, messinki	1
1	Kesähoikkeli, messinki	1
Dno		Kpl

[illegible]